


# BS5153 Swing Type Check Valve



NO.	Part	Material
1	Body	GG20/GG25/GGG40/GGG50
2	Bonnet	GG20/GG25/GGG40/GGG50
3	Disc	GG20/GG25/GGG40/GGG50 with Brass/Bronze/Stainless steel
4	Seat	Brass/Bronze/Stainless steel
5	Pin	2CR13 SS304

## DESCRIPTION

1. Working pressure: 1.0/1.6Mpa
2. Working temperature: -20°C ~ +120°C
3. Flange connection according to BS4504
4. Face to face: BS5153
5. Design standard: BS5153
6. Medium: Water, Steam, Oil etc.

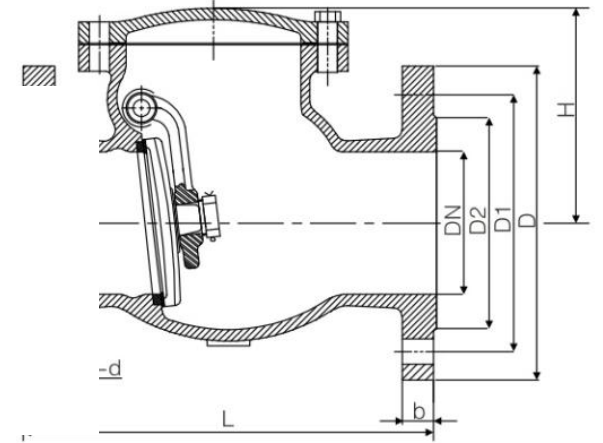

DN		50	65	80	100	125	150	200	250	300
L		203	216	241	292	330	356	495	622	698
D	PN10	165	185	200	220	250	285	340	395	445
	PN16								405	460
D1	PN10	125	145	160	180	210	240	295	350	400
	PN16								355	410
D2	PN10	102	122	138	158	188	212	268	320	370
	PN16									378
b		14	14	17	17	19	19	22	23	26
n-d	PN10	4-18	4-18	8-18	8-18	8-18	8-22	8-22	12-23	12-23
	PN16							12-22	12-28	12-28
H	PN10	137	147	160	180	203	223	258	290	325
	PN16			159						