


DIN3202-F6 Swing Type Check Valve



NO.	Part	Material
1	Body	GG20/GG25/GGG40/GGG50
2	Bonnet	GG20/GG25/GGG40/GGG50
3	Disc	GG20/GG25/GGG40/GGG50 with Brass/Bronze/Stainless steel
4	Seat	Brass/Bronze/Stainless steel
5	Pin	2CR13 SS304

DESCRIPTION

1. Working pressure: 1.0/1.6Mpa
2. Working temperature: -20°C ~ +120°C
3. Flange connection according to DIN2532 DIN2533 DIN 2501 EN1092
4. Face to face: DIN3202-F6
5. Design standard: DIN3356
6. Medium: Water, Steam, Oil etc.

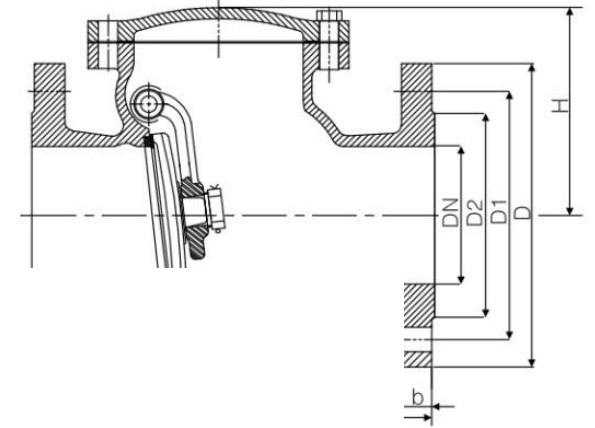

DN		40	50	65	80	100	125	150	200	250
L		180	200	240	260	300	350	400	500	600
D	PN10	150	165	185	200	220	250	285	340	395
	PN16									405
D1	PN10	110	125	145	160	180	210	240	295	345
	PN16									355
D2	PN10	88	102	122	138	158	188	212	268	320
	PN16									
b	PN10	14	14	14	17	17	19	19	22	23
	PN16	18	20	20	22	24	26	26	30	32
n-d	PN10	4-19	4-19	4-19	8-19	8-19	8-19	8-23	8-23	12-23
	PN16								12-23	12-28
H		120	137	147	159	180	203	223	258	290