


DIN3352-F4 New Style Soft Seat Gate Valve



NO.	Part	Material
1	Body	GGG50
2	Wedge	GGG50+NBR
3	Stem Nut	Brass
4	Gasket	EPDM
5	Bonnet	GGG50
6	Stem	2Cr13
7	Bolt	40Cr
8	O-ring	EPDM
9	Washer	PTFE
10	Nut	Brass
11	Anti-dust ring	EPDM
12	Handwheel	GGG50+NBR
13	Bolt	40Cr

DESCRIPTION

1. Working pressure: 1.0Mpa/1.6Mpa
2. Working temperature: 0°C ~ +80°C
3. Face to face according to DIN3202-F4/F5, GB-T1221
4. Flange according to DIN2533, EN1092, BS4504, GB/T 17241.6
5. Design standard: DIN3352, BS5163, G/B
6. Medium: Water, Steam, Oil, Gas etc.

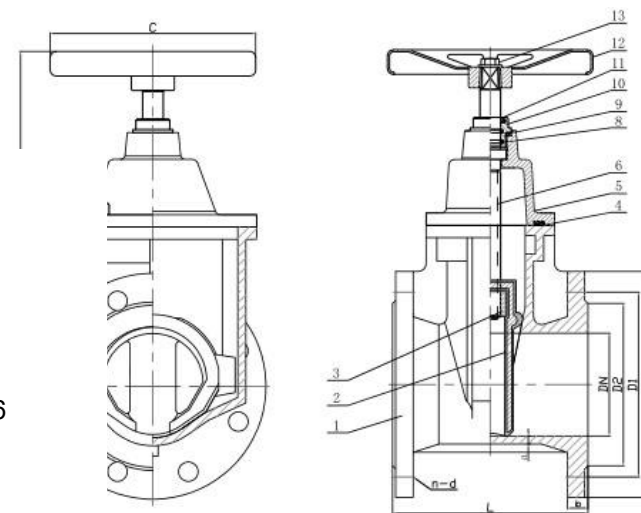

DN		50	65	80	100	125	150	200	250	300
L	F4	150	170	180	190	200	210	230	250	270
	F5	250	270	280	300	325	350	400	450	500
	BS5163 GB	178	190	203	229	254	267	292	330	356
D	PN10	165	185	200	220	250	285	340	395	445
	PN16								405	460
D1	PN10	125	145	160	180	210	240	295	350	400
	PN16								355	410
D2	PN10	102	122	138	158	188	212	268	320	370
	PN16									378
b	F4/F5/BS5163	19	19	19	19	19	19	20	22	24.5
n-d	PN10	4-19	4-19	8-19	8-19	8-19	8-23	8-23	12-23	12-23
	PN16							12-23	12-26	12-26
H	F4/F5/BS5163	225	250	285	330	360	410	490	565	670
C	F4/F5/BS5163	160	180	200	200	250	250	280	320	350