


DIN3352-F4 Soft Seat Gate Valve



NO.	Part	Material
1	Body	GGG40/GGG50
2	Bonnet	GGG40/GGG50
3	Stem	2Cr13/SS304/SS316/Brass
4	Disc	GGG40/GGG50 with NBR/EPDM
5	Stem Nut	Brass

DESCRIPTION

1. Working pressure: 1.0Mpa/1.6Mpa
2. Working temperature: -20°C ~ +120°C
3. Face to face according to DIN3202-F4, EN558-14
4. Flange according to DIN2532, DIN2533, DIN2501, EN1092
5. Design standard: DIN52, EN558-1
6. Medium: Water, Steam, Oil etc.

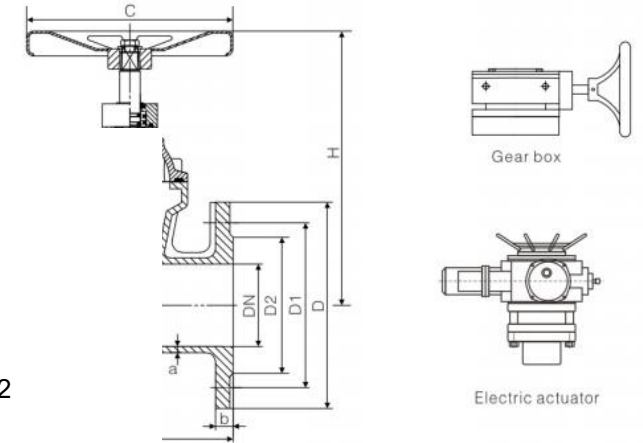

DN		40	50	65	80	100	125	150	200	250	300	350	400	450	500
L		140	150	170	180	190	200	210	230	250	270	290	310	330	350
D	PN10	150	165	185	200	220	250	285	340	395	445	505	565	615	670
	PN16									405	460	520	580	640	715
D1	PN10	110	125	145	160	180	210	240	295	350	400	460	515	565	620
	PN16									355	410	470	525	585	650
D2	PN10	88	102	122	138	158	188	212	268	320	370	430	482	530	586
	PN16									378	438	490	548	610	610
b		17	17	17	17	19	19	19	22	23	26	28	30	30	32
n-d	PN10	4-18	4-18	4-18	8-18	8-18	8-18	8-22	8-22	12-22	12-22	16-22	16-26	20-26	20-26
	PN16								12-22	12-28	12-28	16-26	16-30	20-30	20-34
H	PN10	200	215	245	285	320	360	415	445	585	670	980	1144	1250	1366
	PN16								480						
C		160	160	180	200	200	250	250	280	320	350	350	500	500	500